


STP-DN 19-25-32

DOUBLE NOTCH PNEUMATIC SEALER FOR STEEL STRAP WITH SEAL FLAT AND ROUND SURFACES — TO BE USED IN COMBINATION WITH MODEL STTR / STTMR TENSIONERS

TECHNICAL DATA / APPLICATIONS :

User friendly pneumatic sealer, rugged design and reliable to use in industrial applications. The sealer group could be turned to have an ergonomic and comfortable use, Available standard in three sizes: 19mm(3/4"), 25mm(1") and 32mm(1-1/4").

Package type	Flat and round surfaces
Strap quality	Standard and High tensile
Strap Width	From 19 up to 32mm (3/4"- 1-1/4")
Strap thickness	From 0,6 to 1,1mm (0.024"- 0.043") Rmax 850N/mm2 From 0.63 to 0.9mm (0.025"—0.035") Rmax 1100N/mm2
Air pressure	From 5 to 6,5 bar MAX
Weight	4,7 Kg (+ 0,4 knob and rubber)
Joint type	Seal—double notch
Seal type	Overlap min. 45mm lenght (1.75")
Order codes STP-DN19; STP-DN25; STP-DN32	140.190.050 ; 140.250.050 ; 140.320.050

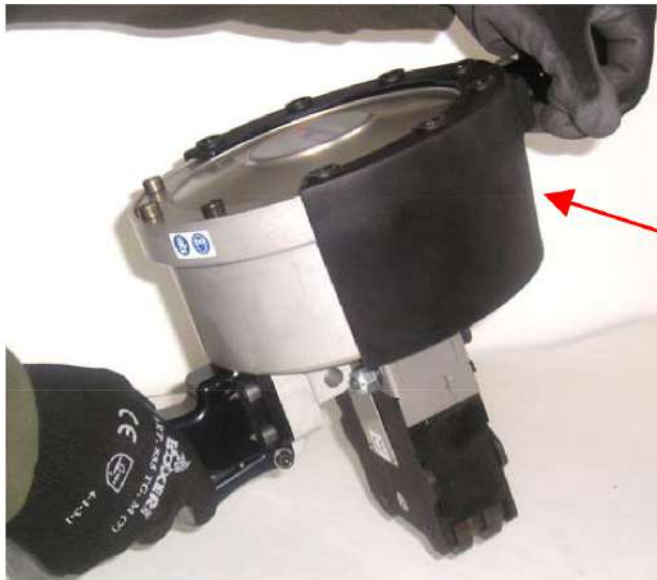

- EASY TO USE
- * MODERN DESIGN
- * ERGONOMIC

NEW RUBBER PROTECTION

NEW


**JOINT TYPE:
SEAL — DOUBLE NOTCH**





STP-DN 19-25-32

- TURNABLE SEALING GROUP

USE THESE SCREWS TO TURN
THE SEALING GROUP

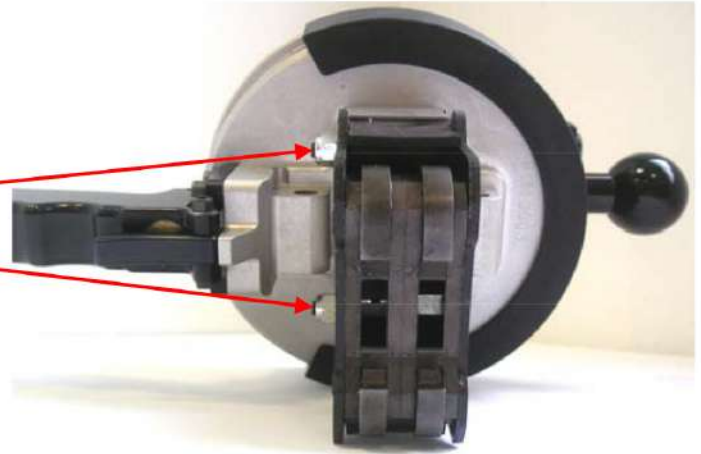

THE SEALING GROUP CAN BE TURNED 90°

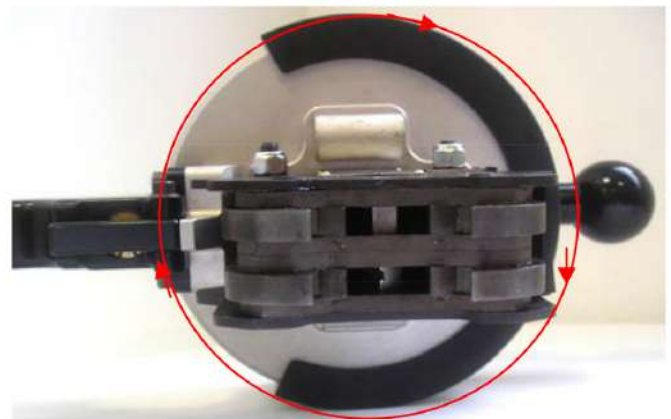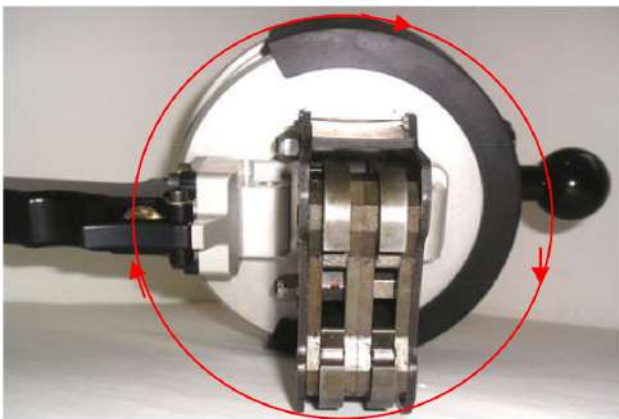

- * MECHANICAL INDUSTRIES
- * CARPENTRY
- * STEEL INDUSTRY
- * TIMBER
- * IRON BANDS, COILS, PIPES

